


Substituted Pyridine Rtx®-1701

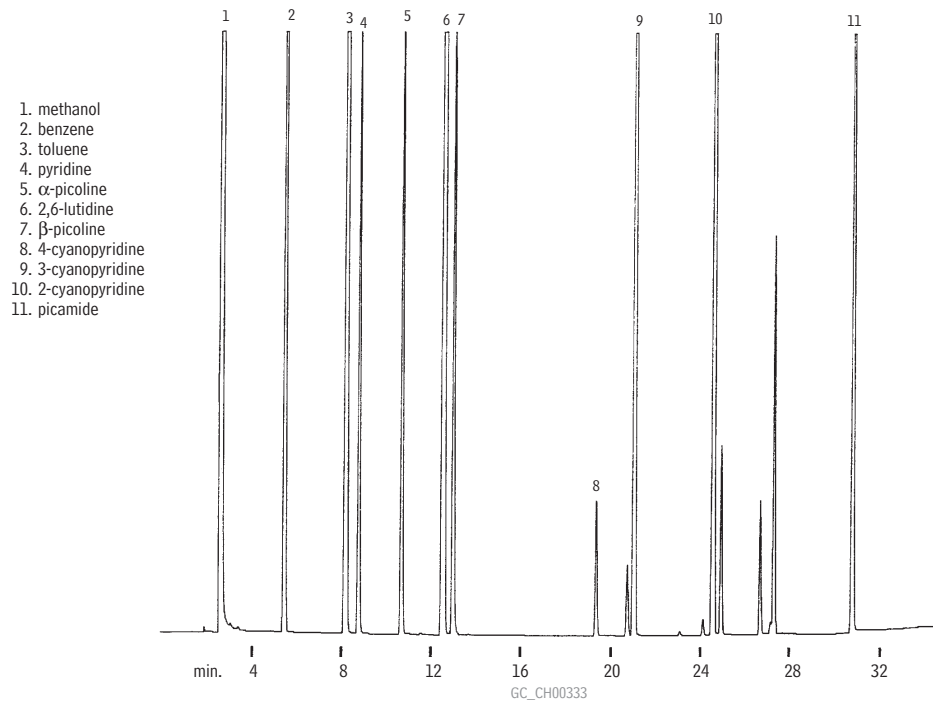

60m, 0.53mm ID, 3.0 μ m Rtx®-1701 (cat.# 12088)
0.1 μ L direct injection of a substituted pyridine standard
(0.5-5% per component), Uniliner® liner

Oven temp.: 60°C to 225°C @ 5°C/min.
Inj. & det. temp.: 230°C
Carrier gas: hydrogen
Linear velocity: 40cm/sec. (flow rate: 5.1cc/min.)
FID sensitivity: 32 x 10⁻¹¹ AFS