


Styrene Impurities Rtx[®]-1701

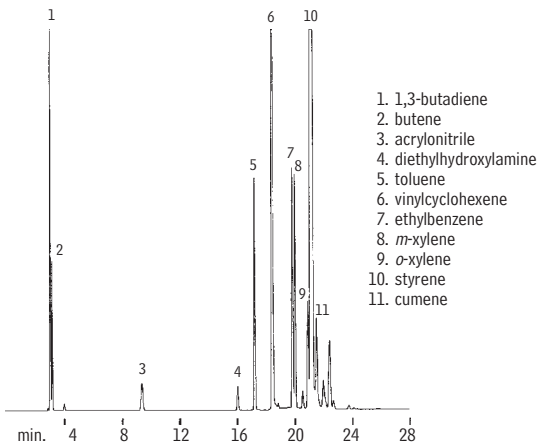

GC_CH00357

30m, 0.53mm ID, 3.0 μ m Rtx[®]-1701 (cat.# 12085)
0.5mL split injection of a 95% pure styrene

Oven temp.: 40°C (hold 10 min.) to 150°C
@ 12°C/min. (hold 15 min.)
Inj. & det. temp.: 150°C
Carrier gas: helium
Linear velocity: 20cm/sec. set @ 40°C
FID sensitivity: 16 x 10⁻¹¹ AFS
Split vent: 40cc/min.

Permission to publish this chromatogram granted
by Copolymer Rubber and Chemical Corp.