


# Phthalate Esters

## US EPA Method 606

### MXT<sup>®</sup>-5

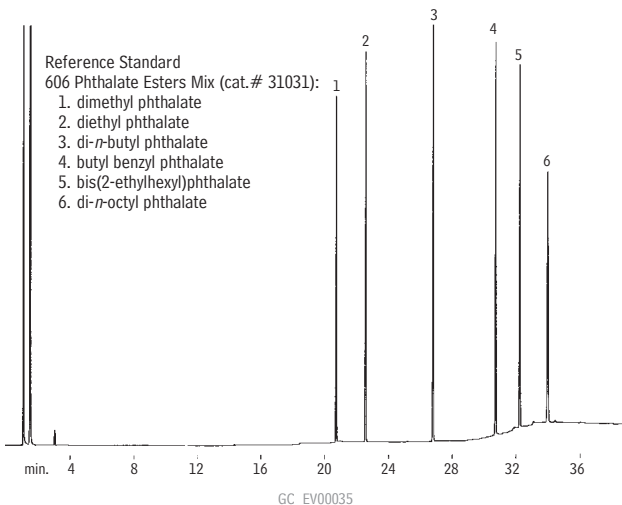

30m, 0.53mm ID, 1.0 $\mu$ m MXT<sup>®</sup>-5 (cat.# 70255)  
0.5 $\mu$ L split injection of phthalate esters.  
Concentration 50ng per component.

Oven temp.: 40°C (hold 6 min.) to 300°C  
@ 10°C/min. (hold 15 min.)  
Inj. & det. temp.: 300°C  
Carrier gas: hydrogen  
Linear velocity: 50cm/sec.  
FID sensitivity: 8 x 10<sup>11</sup> AFS  
Split ratio: 50:1

Restek Corporation 110 Benner Circle Bellefonte, PA 16823  
814-353-1300 • 800-356-1688 • Fax: 814-353-1309 • www.restek.com