


Alcoholic Beverages Acids and Esters Stabilwax®-DA

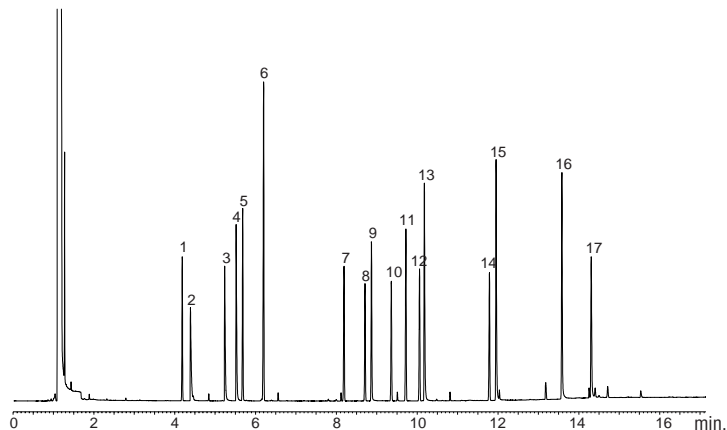

GC_FF00526

Stabilwax®-DA 30m, 0.18mm ID, 0.18µm (cat.# 550752)

Inj.: 1µL splitless (hold 0.5 min.) at conc. shown in peak list, in ethyl acetate, 4mm ID splitless liner w/wool (cat.# 20814-202.1)

Inj. temp.: 240°C

Carrier gas: hydrogen

Make-up gas: nitrogen

Linear velocity: 28psi @ 240°C

Oven temp.: 70°C to 240°C at 12°C/min. (hold 3 min.)

Det.: FID

Peak List	Conc. (ppm)
1. ethyl octanoate	100
2. acetic acid	100
3. propionic acid	100
4. isobutyric acid	100
5. decanol 3	50
6. ethyl decanoate	50
7. ethyl laurate	50
8. <i>cis</i> -lactone	100
9. 2-phenylethanol	50
10. <i>trans</i> -lactone	100
11. methyl myristate	50
12. ethyl myristate	50
13. octanoic acid	100
14. ethyl palmitate	50
15. decanoic acid	100
16. dodecanoic acid	100
17. vanillin	100