


Aromatics (Benzene/Toluene/Xylene) MXT®-WAX

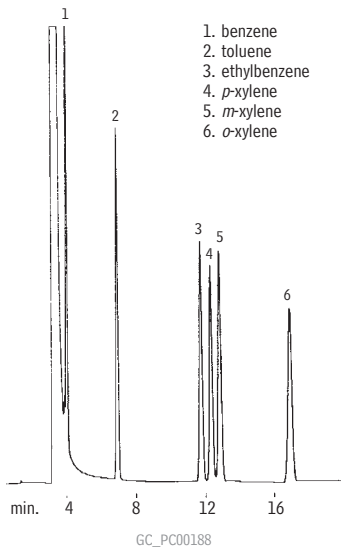

30m, 0.28mm ID, 1.0 μ m MXT®-WAX (cat.# 70654)
1.0 μ L split injection of BTEX Standard (cat.# 30051)

Oven temp.: 60°C
Inj. & det. temp.: 260°C
Carrier gas: hydrogen
Linear velocity: 38cm/sec.
FID sensitivity: 3.2 x 10⁻¹¹ AFS
Split ratio: 100:1